



# PL5

## CAPTURE CARD MONITOR




# 5.4"

Basic Parameters		Input Interface	
Screen Size	5.4"	HDMI Input	4K30p
Color Gamut	85%NTSC	USB 2.0	Upgrade Firmware / Load 3D LUT
Resolution	1920X1152	USB 3.0(TYPE-C)	Supports 5V Power Supply
Dimension	135.1×82.5×22mm	Support Battery Model	SONY NP-F970/F960/F750/F550
Viewing Angle	178°H/178°V	3.5MM Microphone Connector	Microphone Input
Brightness	500nits		
Contrast Ratio	1000:1	<b>Output Interface</b>	
Color Depth	10bit(8+2 FRC)	HDMI Output	1080p60 (With optional embedded
Weight	154.5g		microphone audio output)
Material	ABS+PC	USB 3.0(TYPE-C)	Available for OBS, Live Streaming Software
Input Voltage	DC 7~24V	3.5MM Headphone Jack	Analogue Audio Output
Maximum Power	7W		Audio Outputs
Fan	Yes		
Operating System	MOVNORM OS	<b>HDMI Input Signal</b>	
		4096×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz	
		3840×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz	
3D LUT	RGB Waveform	1920×1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz	
Luma Waveform	Luma Histogram	1920×1080psf@23.97Hz,24Hz,25Hz,29.97Hz,30Hz	
Peaking	False Color	1920×1080i@50Hz,59.94Hz,60Hz	
Grids	Guides	1280×720p@50Hz,59.94Hz,60Hz	
Cross Hair	Check Field	720×576p@50Hz	
Backlight	Brightness	720×576i@50Hz	
Contrast	Chroma	720×480p@50Hz,59.94Hz,60Hz	
Sharpness	Tint	720×480i@50Hz,59.94Hz,60Hz	
Color Temperature	Display Flip Mode		
Osd Flip Mode	H Flip	<b>Output Signal</b>	
V Flip	Function Setting	HDMI OUT 1920×1080p60	
Battery Power Display	Anamorphic	TYPE-C OUT 1920×1080p60	
Live Mode	Gesture Amplification		
Vertical Extension	Zebra	<b>TYPE-C Video Output Format</b>	
Rectangle Crop	Audio Meters	1920×1080p60	
Image Capture	HDR(HLG)	YUY2、MJPEG	
Image Overlay	Color Grader		
Manual Setting of Colour Temperature			

# Product Specification

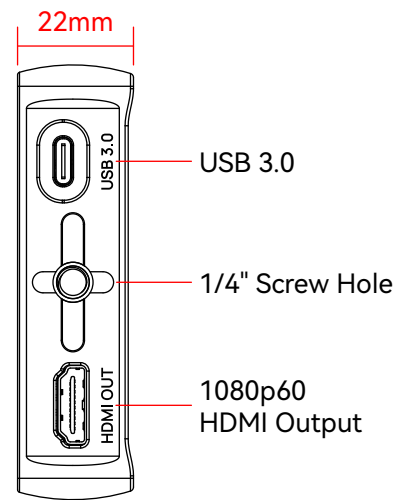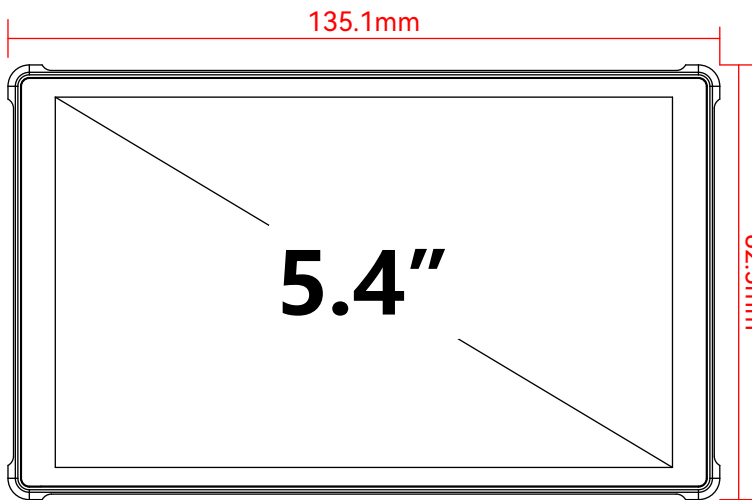

NP-F Battery Plate

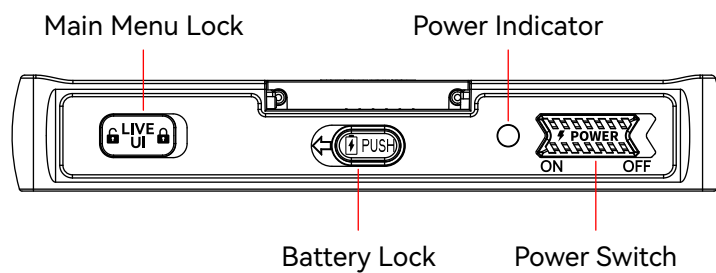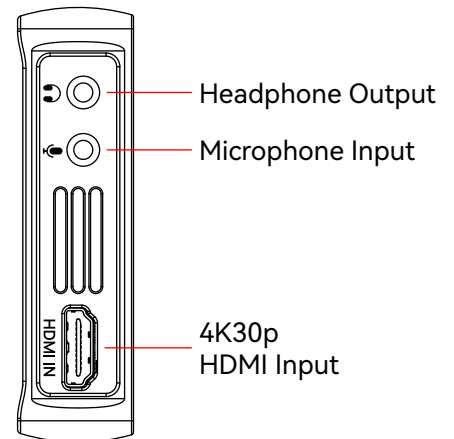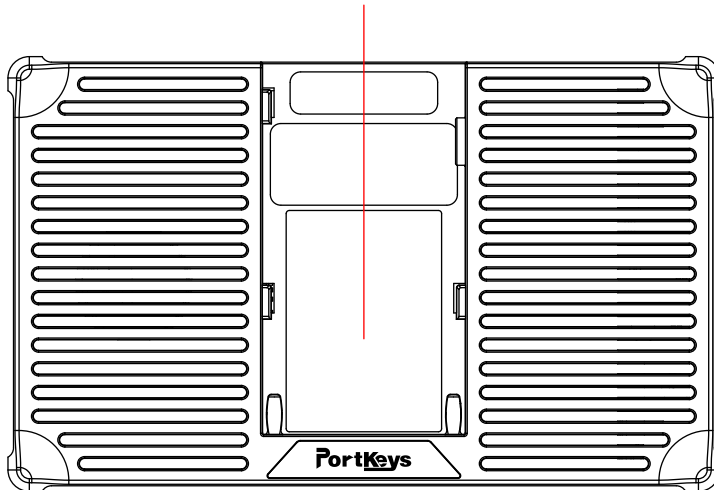

Upgrade Firmware / Load 3D LUT

