

# PL5

5.4" 4K HDMI Live Streaming Monitor With Capture Card



3D LUT



USB 3.0



Image Flip



Silent Fan



4K30p  
HDMI Input



## 360° Color Grader

Manually picks colors and adjust value, hue and saturation. Delicate color clearly shows the details of image



## Self-contained Capture Card

Monitor the screen, and capture live content via the USB 3.0 interface simul



## Stretch Leg Function

Supports screen stretching and real-time monitoring, improving the visual appeal of live content

## Anamorphic De-squeeze

Supported Ratio:  
1.00X/1.33X/1.42X/1.50X/1.60X/1.66X/1.85X/  
2.00X/2.35X/Custom adjustment ratio

## Quick Adjustment Screen

Quickly adjust sharpness, tint, contrast, and chroma during live-streaming optimize color errors during live streaming for better live images

## Custom Rectangular Image Crop

Preset cropping range for a more detailed view of shooting details

## Free Setting of Peak Frames

Customize the peaking ranges for more precise and intuitive monitoring

# PRODUCT INTRODUCTION



**PortKeys**

## Basic Parameters

Screen Size	5.4"
Color Gamut	85%NTSC
Resolution	1920X1152
Dimension	135.1×82.5×22mm
Viewing Angle	178°H/178°V
Brightness	500nits
Contrast Ratio	1000:1
Color Depth	10bit(8+2 FRC)
Weight	154.5g
Material	ABS+PC
Input Voltage	DC 7~24V
Support Battery Model	SONY NP-F970/F960/F750/F550
Maximum Power	7W
Fan	Yes
Operating System	MOVNORM OS

## Software Function

3D LUT	Live Mode	Color Grader
RGB Waveform	Luma Waveform	Luma Histogram
Peaking	False Color	Grids
Guides	Cross Hair	Check Field
Backlight	Brightness	Contrast
Chroma	Sharpness	Tint
Color Temperature	Display Flip Mode	Osd Flip Mode
H Flip	V Flip	Function Setting
Battery Power Display	Anamorphic	Zebra
Gesture Amplification	Vertical Extension	Audio Meters
Rectangle Crop	HDR(HLG)	Image Overlay
Image Capture	Manual Setting of Colour Temperature	

## Input Interface

HDMI Input	4K30p
USB 2.0	Upgrade Firmware / Load 3D LUT
USB 3.0(TYPE-C)	Supports 5V Power Supply
Support Battery Model	SONY NP-F970/F960/F750/F550
3.5MM Microphone Connector	Microphone Input

## Output Interface

HDMI Output	1080p60 (With optional embedded microphone audio output)
USB 3.0(TYPE-C)	Available for OBS, Live Streaming Software
3.5MM Headphone Jack	Analogue Audio Output、Audio Outputs

## HDMI Input

4096×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz
3840×2160p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz
1920×1080p@23.97Hz,24Hz,25Hz,29.97Hz,30Hz,50Hz,59.94Hz,60Hz
1920×1080psf@23.97Hz,24Hz,25Hz,29.97Hz,30Hz
1920×1080i@50Hz,59.94Hz,60Hz
1280×720p@50Hz,59.94Hz,60Hz
720×576p@50Hz
720×576i@50Hz
720×480p@50Hz,59.94Hz,60Hz
720×480i@50Hz,59.94Hz,60Hz

## HDMI Output


1920×1080p60
--------------

## TYPE-C Video Output Format

1920×1080p60
YUY2、MJPEG




NP-F Battery Plate

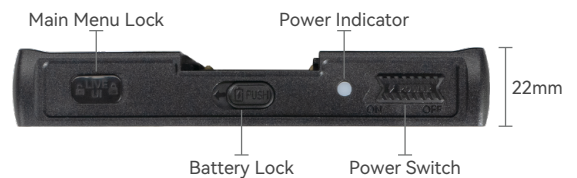

Upgrade Firmware / Load 3D LUT



1/4" Screw Hole

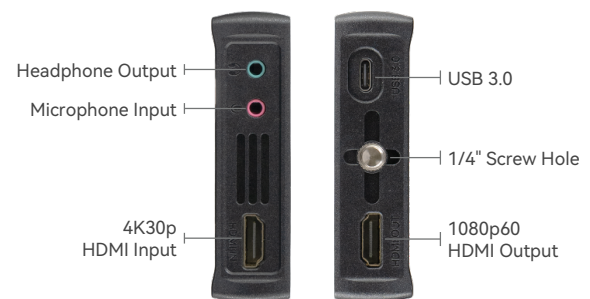

## Packing List

